

REVOLUTION™


by Quick Pak Inc.

Low Profile Pallet Stretch Wrapper

\$4.800 Each
or
Free With 200
Rolls of Film



The *Revolution*™ uses a "Quick Thread" simplified stretch film carriage.

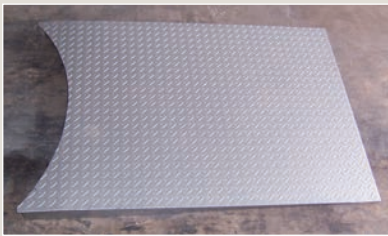


Option of a custom fit all steel ramp for pallet jack loading.

Revolution™

Quick Pak is proud to introduce our new value priced semi automatic stretch wrapper. This price competitive workhorse will give you years of trouble free operation. It will alleviate the problems associated with poorly hand wrapped pallets.

The *Revolution*™ represents a totally advanced design with reliable technology in a sleek efficient frame to give you a rugged machine of unmatched quality.

The *Revolution*™ was designed to convert the hand wrap user over to wrapping pallets by machine.

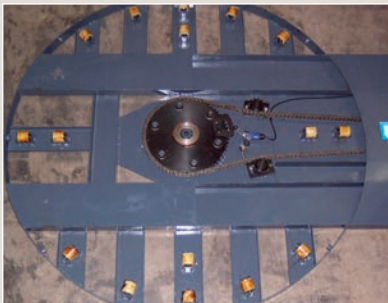

The *Revolution*™ uses 16 extra wide support rollers and heavy-duty chain drive.

QUICK PAK INC.

1100 North 28th Street Tampa, FL 33605

Tel: 813 242 6995 Fax: 813 242 6985 Email: service@quickpakinc.com

QUICK PAK INC.




Heavy Duty 1 hp Motor



**Clean and Simple
To Operate PLC**



**Heavy Duty Turntable
1/2" Thick Steel**

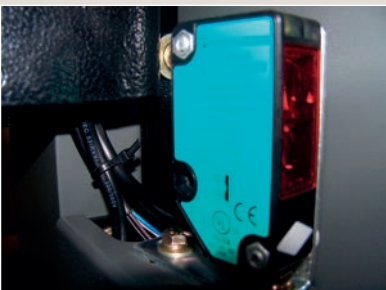

**Automatic Height Detection
Photo Eye**

Revolution™ Low Profile Pallet Stretch Wrapper

| | |
|------------------------|--|
| Power Requirements | 115V / 1Ph / 15A dedicated service |
| Maximum Load Size | 50" W x 50" L x 94.5" H |
| Maximum Load Weight | 4000 Lbs dynamic |
| Turntable | 65" diameter laser-cut steel plate 16 point cam-follower support system Turntable height 3.5" from floor Safety surround ring encloses turntable |
| Turntable Drive | 12-RPM rotational speed 1 HP AC variable speed motor ANSI #50 direct chain drive c/w shock dampener |
| Film Delivery | Quick thread web tensioning system |
| Film Capacity | Strength Wrap Prestretched Film Cling-TITE Performance Cast Film |
| Control Features | Simple to operate LCD Screen and PLC Single button automatic cycle start Emergency stop button Variable film carriage speed/carriage pause control Variable turntable speed control Auto load height detection photo-eye |
| Other Features | All heavy-duty steel construction 1,300 Lbs shipping weight |
| Environment Conditions | Humidity 98% Temperature range 38F – 102F Noise 75 DB |
| Options | Heavy-duty steel ramp for pallet jack (41.5"W x 59"L) |

1100 North 28th Street Tampa, FL 33605

Tel: 813 242 6995 Fax: 813 242 6985 Email: service@quickpakinc.com

www.quickpakinc.com